

# PolaNt-x MF

High-precision multi-frequency GNSS antenna



Mapping



Survey & GIS



Marine



Automation



Precision Agriculture



## KEY FEATURES

- ▶ **Multi-constellation tracking: GPS, Galileo, GLONASS, BeiDou, NavIC and QZSS**
- ▶ **Reception of Inmarsat L-Band signals compatible with correction services**
- ▶ **Superior multipath characteristics**
- ▶ **Ruggedized design**

**PolaNt-x MF is a lightweight high-precision antenna for geodetic, survey and machine control applications. This high-gain antenna incorporates low-noise amplifiers, enabling multi-frequency GNSS signal reception and are built into a rugged and environmentally sealed housing.**

The PolaNt-x MF antennas have an optimised ground plane design, providing excellent multipath characteristics.

Enabling the tracking of the upper and lower (1525-1610 MHz, 1160-1252 MHz) GNSS signals, the PolaNt-x MF is ideal for high precision applications.

# PolaNt-x MF

## FEATURES

### Signals

L-Band (MSS)	
GPS	L1, L2, L5
GLONASS	L1, L2, L3
Beidou	B1, B2
Galileo	E1, E5a, E5b
SBAS	L1, L5
NavIC	L5
QZSS	L1, L2, L5

### Frequencies

1525-1610 MHz  
1160-1252 MHz

### Polarisation

RHCP

### Axial Ratio

3 db Max

### Radiation Coverage

Zenith	6.0 dBic
15° elevation	-2.0 dBic
10° elevation	-3.0 dBic
5° elevation	-4.0 dBic
Horizon	-5.0 dBic

### Amplifier


Gain	39 ± 2 dB
Noise Figure	2.6 dB max
Input Voltage	+3 to +15 VDC
Current	45 mA (typ)
Impedance	50 Ω
VSWR	≤ 2.0:1

### Physical and Environmental


Finish	Weatherproof polymer
Weight	450 g / 0.99 lbs
Diameter	190 mm / 7.50 in
Connector	TNC Female
Temperature	-50° C to +70° C -58° F to 158° F
Certification	CE, RoHS and WEEE



## DIMENSIONS

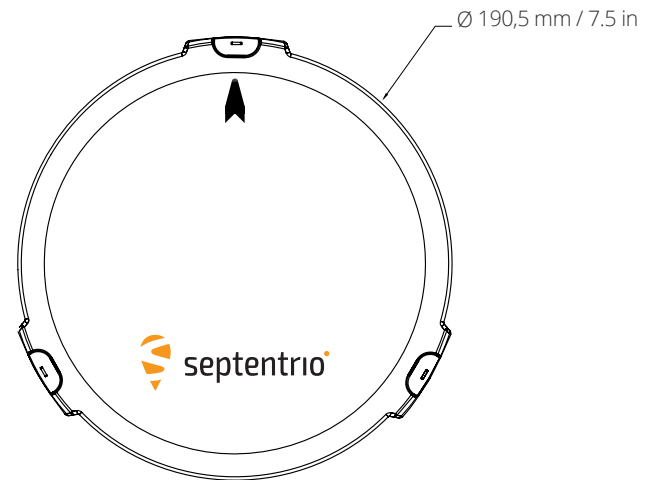


### TNCF CONNECTOR

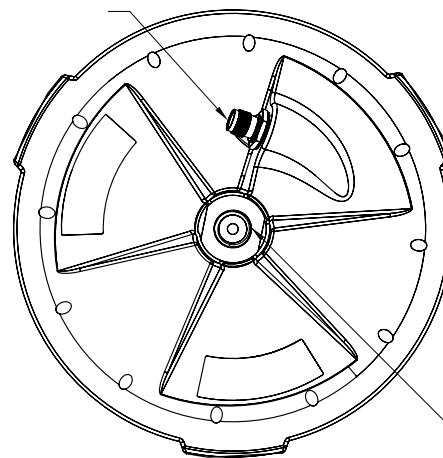

5/8-11 UNC-2B ADAPTER  
PERMANENTLY INSTALLED

### PHASE CENTER OFFSETS

L1 = 57,8 mm / 2.28 in  
L2 = 65,9 mm / 2.59 in

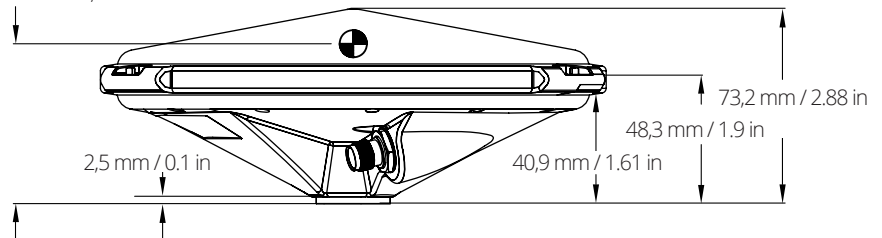

Ihr Partner für Vermessung und Vermarktung  
**JOSEF ATTENBERGER GMBH**

JOSEF ATTENBERGER GMBH, Wasserburger Str. 7, D-84427 Sankt Wolfgang  
www.attenberger.de, info@attenberger.de, Freecall Telefon 0800-2883623  
Fax: +49 (0) 8085-930550 [www.facebook.com/attenberger.gmbh/](https://www.facebook.com/attenberger.gmbh/)  
[www.youtube.de/attenberger](https://www.youtube.de/attenberger) [www.instagram.com/attenberger\\_vermessung](https://www.instagram.com/attenberger_vermessung)  
<https://de.linkedin.com/company/josef-attenberger-gmbh>